


# ClassGuard™ for Sidelites

Prepare for lockdown situations by blocking vision into classrooms where students and teachers may be sheltering in place.

The new retrofit ClassGuard Privacy Screen can be added to existing sidelites to block light and provide privacy into the classroom.

Now safety meets functionality.

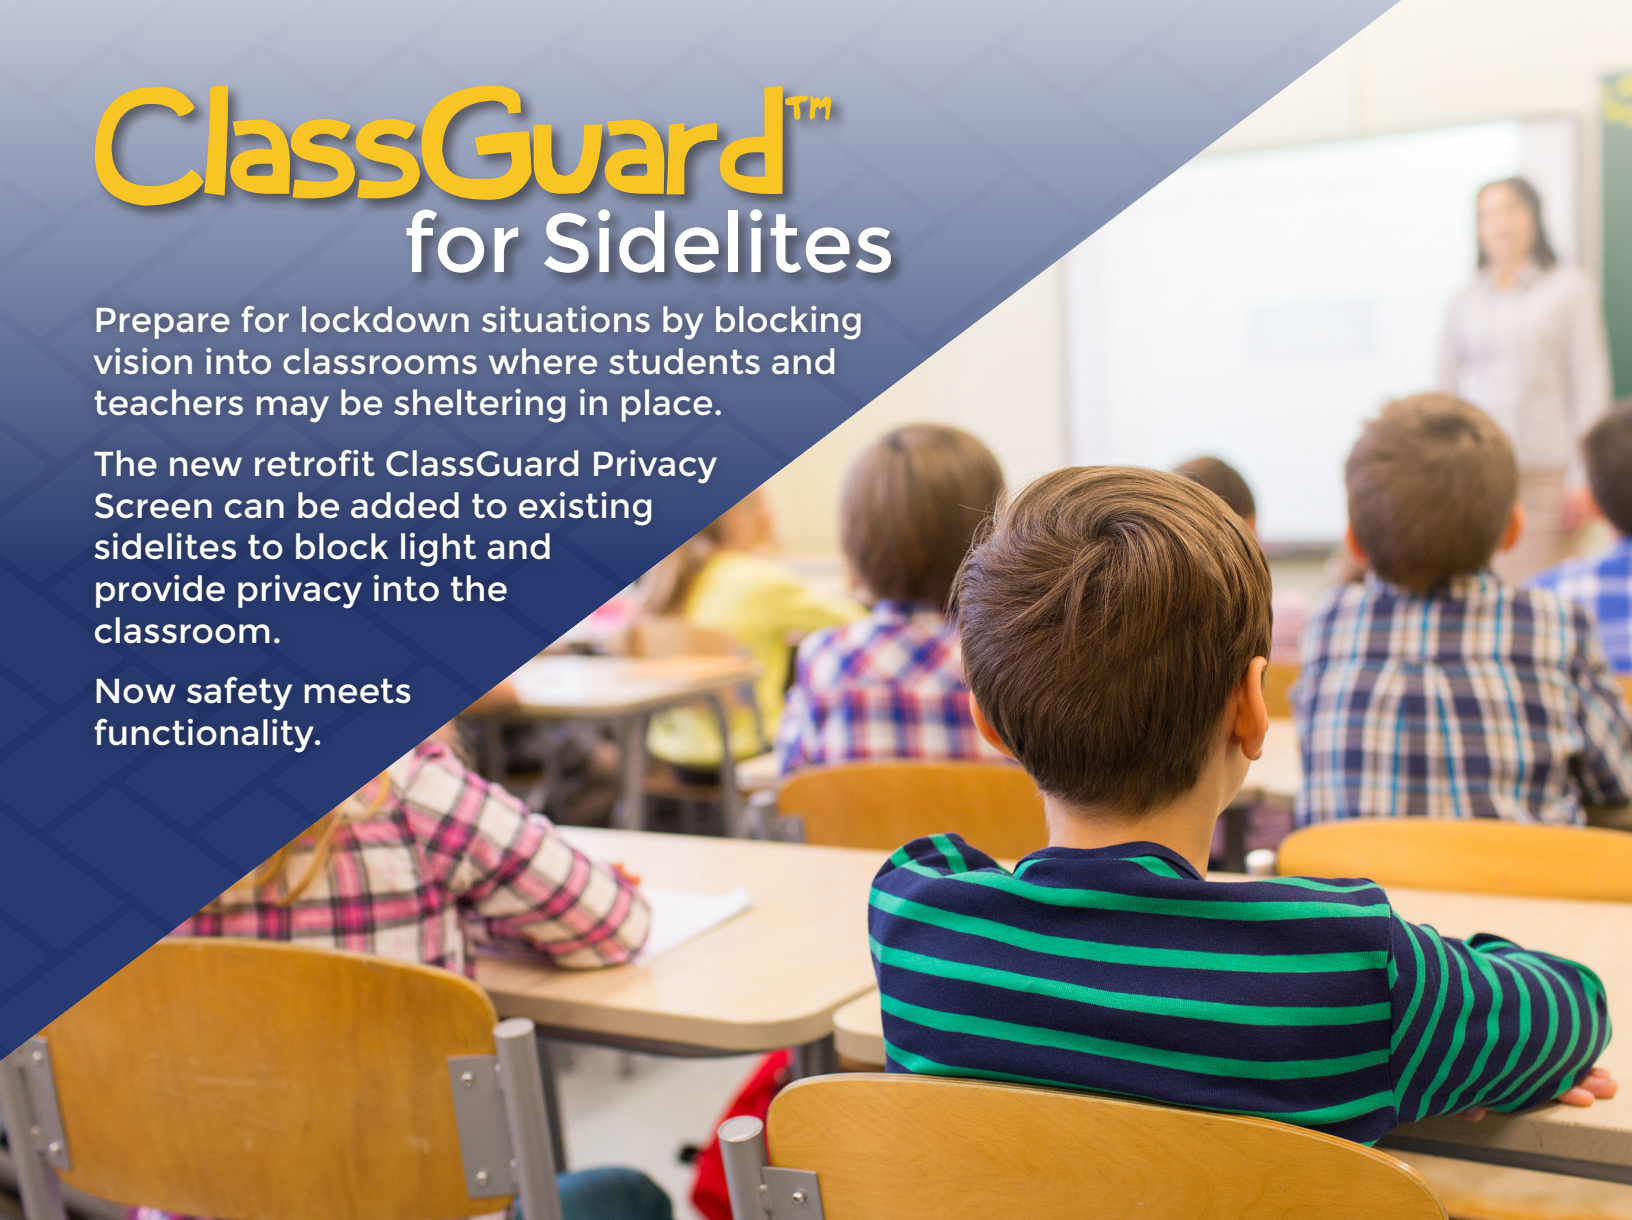

## Make ClassGuard a Part of Your Emergency Preparedness Plan:

- Add to existing doors and sidelites for use during lockdown drills to block vision into the room
- Easy installation for facility managers - installs in minutes!

## Additional Everyday Benefits:

- Great for privacy during testing, counseling sessions or special education classes
- 100% light blocking screen for videos or presentations




# How to Order ClassGuard™

## TWO MOUNTING OPTIONS AVAILABLE


### Options A & B

The ClassGuard for Sidelites can be mounted to either the glazing stops or the outside frame of the sidelite.

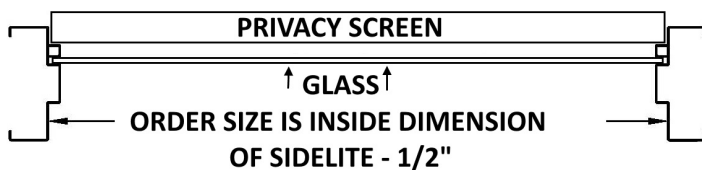

### Mounting Option A:

Measure outside dimension of the face of the sidelite, and size to cover the sidelite frame on the room side.

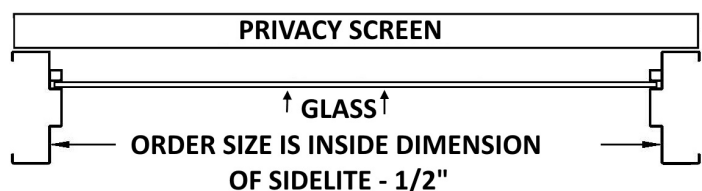

### Mounting Option B:

Measure inside dimension and size to be installed on glazing stops on room side. Deduct 1/2" on H & W to assure fit.

## ClassGuard Technical Specs:

CONSTRUCTION	Aluminum 1-1/4" x 1/4" frame on 4 sides with radius corners, mitered and welded. 7/8" deep slots on both sides do not allow any light to penetrate—even on the edges.
ROLLER	A spring-operated roller in an aluminum housing allows for controlled opening and closing of the unit. Push-button retraction quickly and easily retracts the shade. Tested to 10,000 cycles.
SHADE	A durable 100% opaque black, light-blocking fabric material, attached to a rigid pull-down bar mounted into the side channels. The shade latches into place when pulled down and retracts when button is pushed.
POWDER COAT FINISHES	Standard colors are Bronze or Silver, but other colors are available upon request. We do not recommend field painting of this product.
SIZES	UL Listed Size: Minimum 13" x 13" or 169 in <sup>2</sup> - Maximum 31 3/8" x 37 3/8". Non-UL Minimum Size: 5" W x 7" H. Order in any size in 1/8" increments.
INSTALLATION	Attach to installed vision lite using 1/2" wide hook and loop fasteners provided. Thickness of the vision lite or construction material does not matter as long as there is a flat 5/8" frame to mount the ClassGuard.

SEE OUR WEBSITE FOR THE MOST CURRENT INFORMATION - [WWW.CLASS-GUARD.COM](http://WWW.CLASS-GUARD.COM)